

JFP-180BB

Searchlight sonar



– a new 180 kHz searchlight sonar that illuminates the underwater scene with highly reliable scans

- 10.4” or 15” high visibility LCD screen (option)**
- Continues searching when adjusting tilt angle**
- Intuitive menu structure**
- Multiple display modes available**
- Flexible black box configuration**

JFP-180BB Searchlight sonar – performance features

Unique features

- The JFP-180BB new and compactly designed searchlight sonar integrates multiple display modes, which will allow you to control your presentation at your own convenience.


Suiting your moment in time

JRC's new JFP-180BB searchlight sonar is black box configured as standard, allowing you to select a preferred display size suiting your vessel. JRC's displays uniformly incorporate a high brightness LCD display, available in 10.4- or 15-inch, ideal for installations on (relative) small commercial fishing vessels.

It also integrates a dedicated one-touch day/night key, which provides suitable brightness to the display images, supporting particular time and scene operations.

Multiple display modes

The sonar integrates multiple display modes, facilitating a valuable working environment. The new JRC searchlight sonar illuminates the underwater scene with a beam of sonic energy, rotating through 360 degrees.

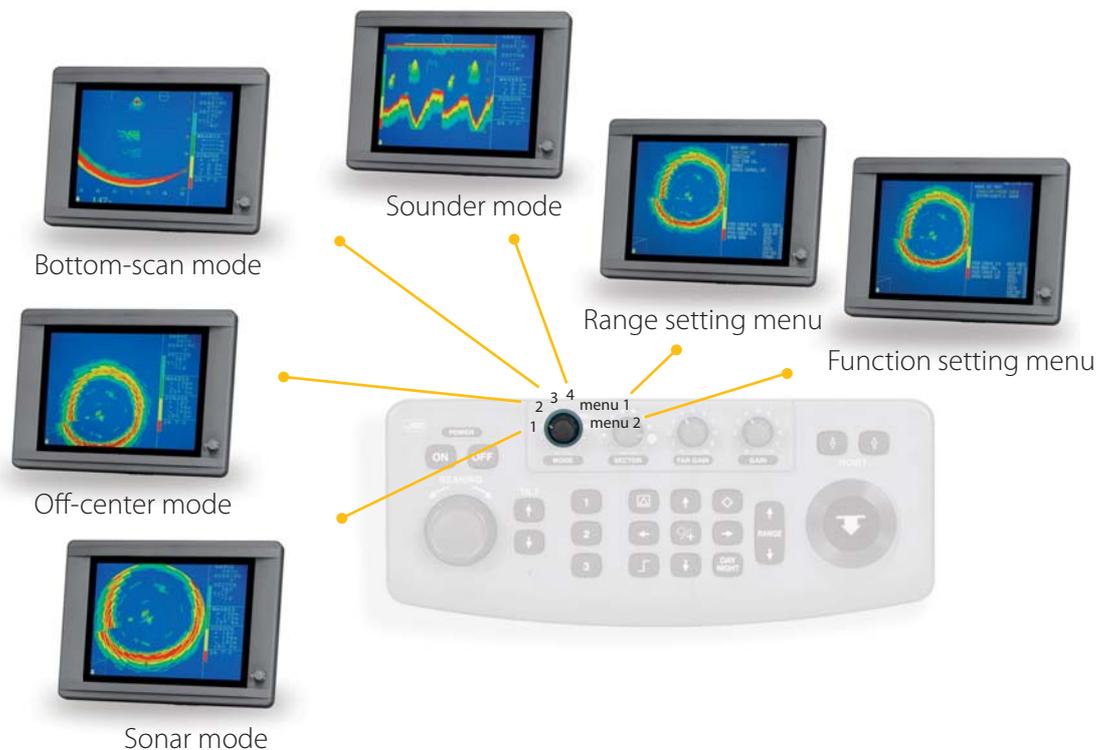

The JFP-180BB provides a range of display modes to suit the search task. You can select a detailed display image at your convenience.

JFP-180BB Searchlight sonar – developed for maximum ease of use

Simple and precise operation

The new searchlight sonar allows you to carry out all operations simply by using the keyboard.

The layout has a full complement of keys, including direct tilting, hoist control, and special one-touch menu keys to access different scanning modes on screen. This makes it easy to navigate through all common used tasks.



The logic of the controls and excellent on-screen menus will greatly shorten most users' learning period.



Colour 'enrichment' palette

Fish and underwater targets are displayed in eight colours, including white, on a high brightness LCD display. The searchlight sonar integrates a colour palette, allowing you to change the ratio of red, green and blue by choosing a different tone. The strength of the colours can be freely set in 15 steps. You can also set the tones according to the target fish species, generating the most optimised on-screen view at your convenience.

JRC StarNetwork™

JRC has been providing sales and support of products since 1915. Today, JRC offers comprehensive assistance through its organisation, in partnership with a worldwide StarNetwork™ of over 270 fully trained and qualified partners and agents, assisting you 24 hours a day, 7 days a week and 365 days a year.



 **JRC one-call™**

One number to call
With JRC you can go anywhere and if you need our support, simply call us at +81 3 3492 9201, anytime.

bottom structure clearly on-screen

JFP-180BB Searchlight sonar – system flexibility

Continues searching when adjusting tilt angle

The newly developed JFP-180BB give the user a feature not previously found on this class of sonar. The searchlight sonar will not stop searching when adjusting the tilt angle. This is a very useful tool for enhancing your efficiency of fishing operations and safety of navigation.


Flexible black box configuration

The searchlight sonar consists of a compact processor, dedicated keyboard and high performance transducer, allowing for a flexible installation approach in confined spaces. JRC also provides an optional 10.4- and 15-inch high brightness monitor, and for those who prefer to specify their own display, the JFP-180BB allows you to choose what type and size of display to connect to the unit. You can choose between CRT and LCD display, as long as it supports VGA.



Interfacing

The new JFP-180BB incorporates a highly reliable industry standard interfacing field. Connect additional navigation equipment, such as GPS, which provides on-screen the exact location of this vessel. It also shows the track line of the vessels' bow wake (wave that relatively spreads out in the rear of the vessel), initially saved every 2 seconds.

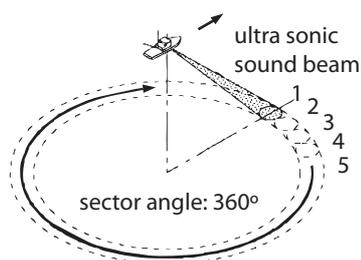


Searching all around

The horizontal scan (sonar mode) can search through a full 360 degree or search a selection of up to 16 different sectors using a 5- or 10-degree beam width.

Optimum tilting

The centre of the beam can be set in 1 degree increments from 5 degrees from the horizontal, to 90 degrees from the sea surface. The transducers ultra sonic beam sweeps a specific sector and bearing. When pointing straight down, the beam will give a high definition picture of the sea floor. As the beam moves from the perpendicular to the horizontal, bottom definition reduces and fish detection improves.

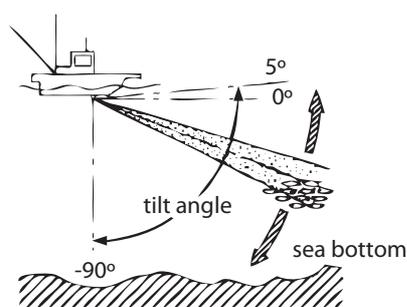

What's standard in the box?

1. Display (excl. in BB config)
2. Processor
3. Keyboard
4. Hull unit
5. Soundome unit
6. Joint pipe
7. Spare parts
8. Cables
9. Manuals (English)

Which cables?

| | |
|--|------|
| Display to processor (excl. in BB config) | 5 m |
| Display to power supply (excl. in BB config) | 5 m |
| Processor to power supply | 3 m |
| Keyboard to processor | 5 m |
| Hull unit to processor (signal) | 15 m |
| Hull unit to processor (hoist) | 15 m |
| Hull unit to power supply | 5 m |




Japan Radio Co., Ltd.


JFP-180BB Searchlight sonar – dimensions and weights

Dimension drawings - Displays¹

NWZ-146 Weight 2,8 kg

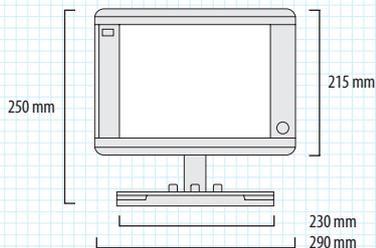



NWZ-164 Weight 3,7 kg



¹displays optional in black box configuration



Dimension drawings - Keyboard

NCH-607E Weight 1 kg

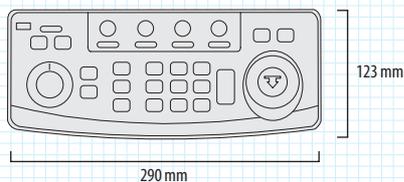


Dimension drawings - Processor

NJC-29E Weight 3,4 kg

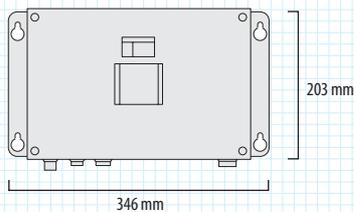

Dimension drawings - Hull unit

NKF-900-00² Weight 44 kg

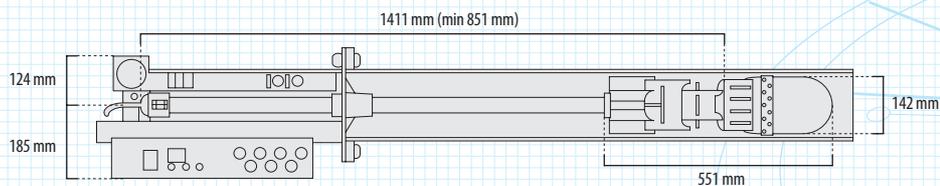

²trunk pipe is optional



Japan Radio Co., Ltd.

JFP-180BB Searchlight sonar

– specifications

| Model | | JFP-180 |
|---------------------------------------|---|---------|
| General | | |
| Sonar type | searchlight sonar | |
| Frequency | 180 kHz | |
| Range | 20 to 2000 m (8 selectable ranges: 12 to 1600 br/fm and 80 to 6000 ft) | |
| Sonar mode (angle) | 5°, 25°, 45°, 85°, 125°, 165°, 205°, 360° (5° step) | |
| | 10°, 30°, 50°, 90°, 130°, 170°, 210°, 360° (10° step) | |
| Bottom-scan mode (angle) | 3°, 27°, 45°, 63°, 93°, 117°, 147°, 177° (3° step) | |
| | 5°, 25°, 45°, 65°, 95°, 115°, 145°, 175° (5° step) | |
| Bearing center | 5° step | |
| Tilt angle | -90° to +5° (1° step) | |
| Display modes | sonar mode, off-center mode, bottom-scan mode, sounder mode | |
| Data display | range, range scale, tilt angle, tilt angle diagram | |
| | sector angle display, bearing angle, interference reduction | |
| | ring marker (historical distance, slant distance, depth) | |
| | cross cursor (bearing, historical distance, slant distance, depth) | |
| | 1) compass display, 1) wake display, 1) ship's speed, latitude/longitude | |
| | gain up, TVG graph, colour scale, temperature, scan display (2 types) | |
| | own ship's position, VRM, depth (on detecting just below the vessel) | |
| Other functions | operation modes (3 types), off-center, mark, train correct | |
| | target lock (in searchlight mode), temperature adjustment | |
| | pulse width, colour palette, gain control, TVG control, dynamic range | |
| | threshold control, output power reduction, external trigger synchronisation | |
| | trigger signal output, hoist sensor lamp, hoist auto up, audio output | |
| | gain, far gain, panel brightness control, day/night | |
| 1) Inputs | NMEA0183 (GLL, GGA, VTG), trigger signal, remote controller | |
| 1) Outputs | latitude/longitude for target, VGA, trigger signal, audio | |
| Power supply | DC 20-30V, 24W | |
| Hull unit | | |
| Frequency | 180 kHz | |
| Hoist stroke | 200 to 400 mm | |
| Hoist time | 10 sec (400 mm stroke, 24V power supply) | |
| External output | signal trigger | |
| Power supply | DC 10.5-30V, 110W | |
| Optional items | | |
| 10.4" display (LCD) | NWZ-146 | |
| 15" display (LCD) | NWZ-164 | |
| Trunk pipe (PVC) | BRBX05030 | |
| Trunk pipe (FRP) | BRBX05037 | |
| External speaker (4Ω) | 6USFD00010 | |
| Remote controller (with cable) | NCH-606 | |
| Remote controller terminal | CQD-2145 (built in NJC-29E, package order with NCH-606) | |
| NAV-IN terminal | CQD-2144 | |
| Trigger input terminal | CQD-2143 (built in NJC-29E, synchronised TB for fish finder) | |
| NMEA output terminal | CQD-2142 | |
| Protective cover for processor (IPX2) | BRBX05381 (desk of floor mount) | |

1) Optional interface may be required

All specifications are subject to change without notification.

For further information please contact:



Japan Radio Co., Ltd.

JRC

Cessnalaan 40-42

1119 NL, Schiphol-Rijk, The Netherlands

T +31 20 6 580 750

F +31 20 6 580 755

E sales@jrceurope.com

W www.jrceurope.com